

Model: LXH-15A2-20A2

Volumetric Water Meter

Feature:

- Pre-equipped for Pulse emitter
- Volumetric piston type
- Material body: Brass
- Size: DN15 to DN20mm, ($\frac{1}{2}$ "- $\frac{3}{4}$ ")
- Available for cold water (50°C)
- Accuracy: Class C / R160 / R200



Pre-equipped For
Pulse- emitter



Main Technical Data:

According to IS04064(GB/T778.1-1996) Standard

Size		Class	Qs Overload Flow	Qp Nominal Flow	Qt Transitional Flow	Qmin Min Flow	Min Reading	Max Reading
DN(mm)	Inch		m³/h		L/h		m³	
15	1/2"	C	3	1.5	22.5	15	0.0001	9999
20	3/4"	C	5	2.5	37.5	25	0.0001	9999

According to IS04064(GB/T778.1-2007) Standard

DN Size	Mm Inch	15 1/2"	20 3/4"
Q4(m³/h)		3.125	5
Q3(m³/h)		2.5	4
R160	Q2(L/h)	25	40
	Q1(L/h)	15.625	25
R200	Q2(L/h)	20	32
	Q1(L/h)	12.5	20
Min reading(m³)		0.0001	0.0001
Max reading(m³)		9999	9999
Max pressure(MAP)		16	16
Max loss(Δ P)		63	63
Max temperature		T50	T50



Model: LXH-15A2-20A2

INDICATING ERROR

At low zone is $\pm 5\%$ from minimum flow rate (q_{min}) to transitional flow rate (q_t) exclusive boundary


At high zone is $\pm 2\%$ from transitional flow rate (q_t) to overload flow rate (q_s)

Head Loss and Error Curve:

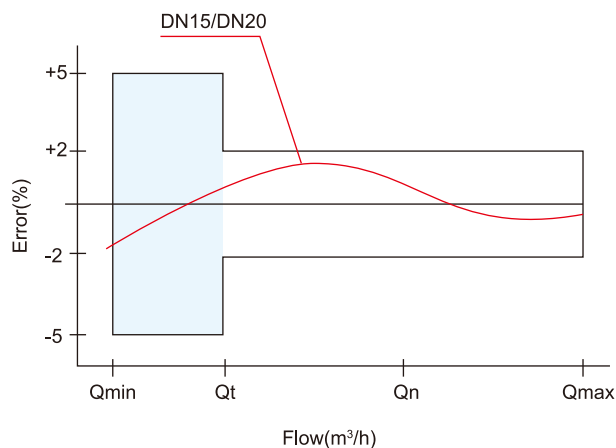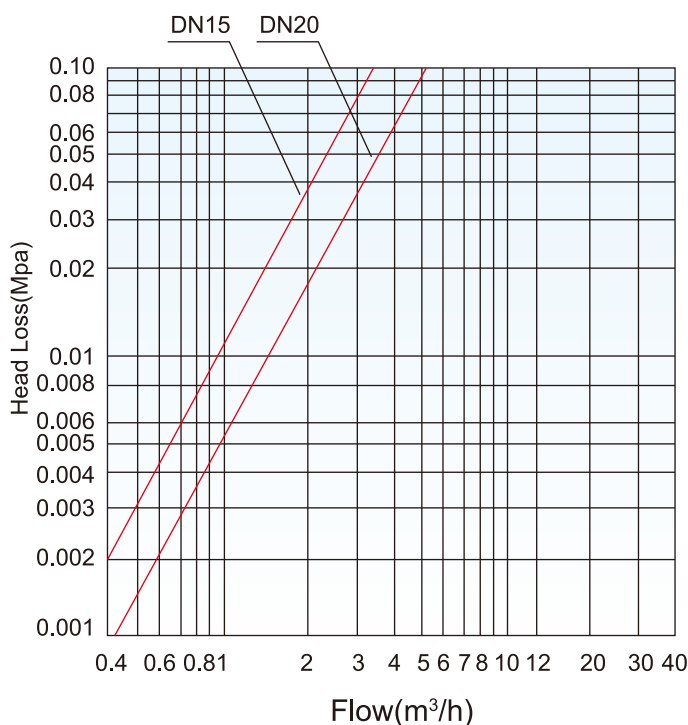

Dimensions and Weight:

Meter Size Dia DN	L Length	L1 Width	W Height	Connecting Thread D	Weight Kg
(mm)	(mm)				
15	115	191	86	G 3/4B	1.00
20	130	228	86	G 1B	1.20

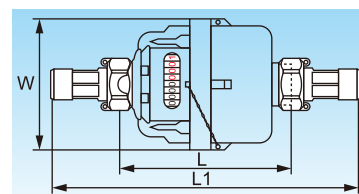

WORKING CONDITION:

Water temperature: $\leq 50^{\circ}\text{C}$ for cold water meter

Working pressure: $\leq 1.6\text{Mpa}$



XINGHANG

Ningbo Xinghang Meter Technology Co., Ltd

<https://www.xinghangmeter.com>

sales@xinghangmeter.com

+86-574-27805927