

XINGHANG

Smart Metering



Built on Innovation For Water Saving



Application Standards

XINGHANG
WWW.XINGHANGMETER.COM


LXC-15S-25S

Application


LXC-15S-25S designed for remote control water supply requirement for households, blocks of flats and for industrial by SS304 valve inbuilt shut off and open.

- M-BUS/RS485 Protocol: *EN13757*
- Modbus Baud Option: *2400 or 9600*
- LoRa/LoRaWAN Frequency Rate:
868MHz, 915MHz, 902MHz, 920MHz, etc

Communication

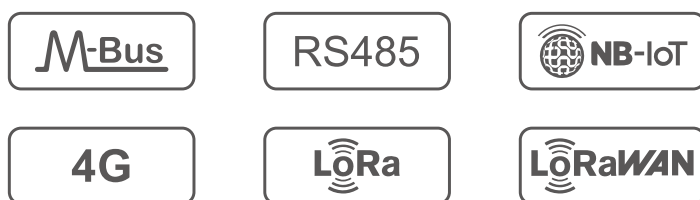


Feature Highlights

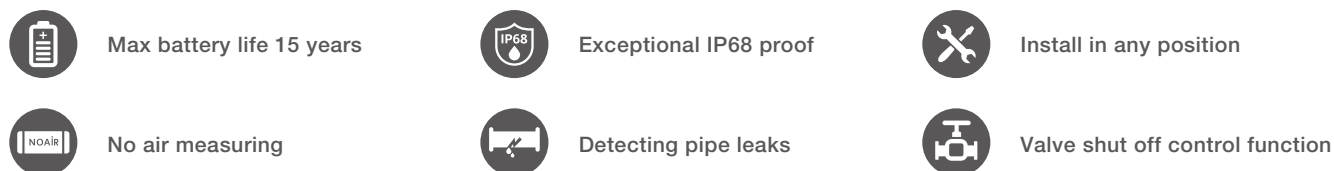


Dimensions


Nominal Diameter (mm)	DN15	DN20	DN25
Thread	G3/4B	G1B	G1 1/4B
L (mm)	130	130	160
H (mm)	125	129	136
W (mm)	88	88	88

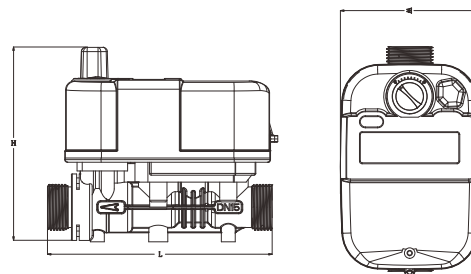

Error Curve

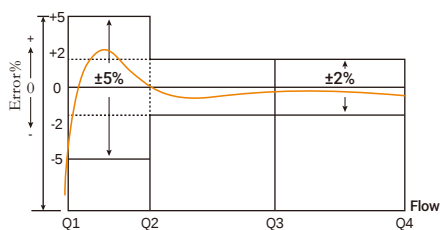

Head Loss Curve

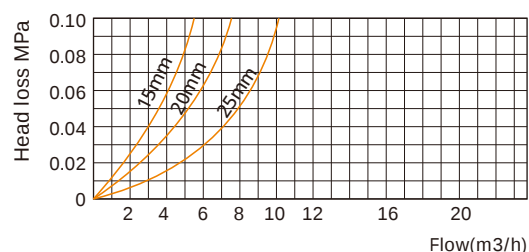



Main Technical Specifications

	DN15	DN20	DN25
Q4(Qoverload)m ³ /h	3.125	5	7.875
Q3(Qmax/permanent)m ³ /h	2.5	4	6.3
Q2(Qtransitional)m ³ /h	0.016	0.0256	0.040
Q1(Qmin)m ³ /h	0.010	0.016	0.0252
Start Flow Rate m ³ /h	0.003	0.005	0.005
Dynamic Range	R250		
Standard	ISO4064 / OIML R49		
Measured Medium	Water		
Metrological Class	Class 2		
Battery	ER34165		
Battery Life	≥10 Years		
Consumption	<0.2mW		
Pressure Loss	Δp63		
EMC	E1		
Environmental Classification	Class B		
Protection Class	IP68		
Medium Temperature	T50		
Storage Temperature	-25~55°C		
MAP	PN16		
Accuracy	±5% in range Q1≤Q<Q2		
	±2% in range Q2≤Q≤Q4		
Material	Composite Material		
The Installation Sensivity	U5/D3		
Climatic and Mechanical	M1		
Key-press	Touch control technology		
Display	LCD 9 digit + prompt		
Menu Contents	Instantaneous flow (m ³ /h), cumulative flow (m ³), full screen display, meter address, cumulative working time (h), date (year/month/day), caliber, software version		
Display Range	Total flow :0m ³ ~+99999.9999m ³		
Communication	Optical Port, LoRaWAN, M-BUS, RS-485, LoRa RF, NB-IoT, 4G (CAT 1)		
Display and Indication	Unit: L/m ³ /Gal (optional)		
Data Storage	36 months		



Installation Position

