

# XINGHANG

Smart Metering



## Built on Innovation For Water Saving



Application Standards

**XINGHANG**  
WWW.XINGHANGMETER.COM


## LXC-15E-20E

### Application

LXC-15E-20E designed for remote control water supply requirement for households, blocks of flats and for industrial by brass valve inbuilt shut off and open.

- M-BUS/RS485 Protocol: *EN13757*
- Modbus Baud Option: *2400 or 9600*
- LoRa/LoRaWAN Frequency Rate: *868MHz, 915MHz, 902MHz, 920MHz, etc*

### Communication

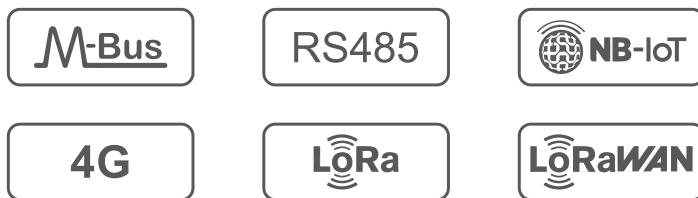


### Feature Highlights


- Max battery life 15 years
- Exceptional IP68 proof
- Install in any position
- No air measuring
- Detecting pipe leaks
- Valve shut off control function

### Dimensions


Nominal Diameter (mm)	DN15	DN20
Thread	G3/4B	G1B
L (mm)	165	195
H (mm)	98.2	98.2
W (mm)	102	102

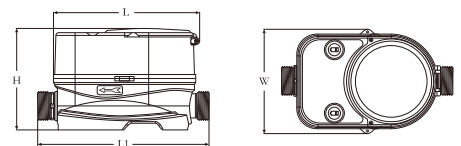

### Error Curve

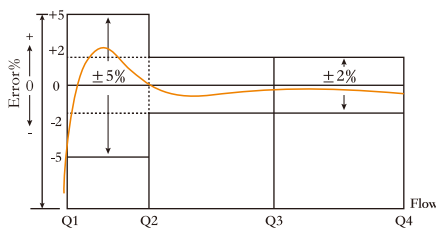

### Head Loss Curve

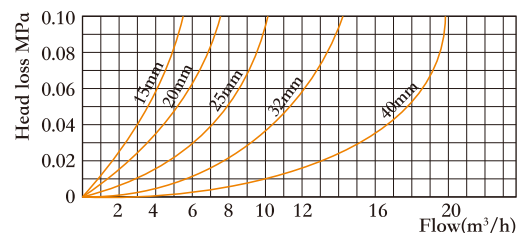

## Main Technical Specifications

	DN15	DN20
$Q_4(Q_{\text{overload}})m^3/h$	3.125	5
$Q_3(Q_{\text{max/permanent}})m^3/h$	2.5	4
$Q_2(Q_{\text{transitional}})m^3/h$	0.016	0.0256
$Q_1(Q_{\text{min}})m^3/h$	0.010	0.016
Start Flow Rate $m^3/h$	0.002	0.002
Dynamic Range	R250	
Standard	ISO4064 / OIML R49	
Measured Medium	Water	
Metrological Class	Class 2	
Battery	3.6V, Li-battery ER26500(Default) / ER34615	
Battery Life	≥10 Years	
Consumption	<0.2mW	
Pressure Loss	Δp40	
EMC	E1	
Environmental Classification	Class B	
Protection Class	IP68	
Medium Temperature	T30/T50	
Storage Temperature	-25~55°C	
MAP	PN16	
Accuracy	±5% in range $Q1 \leq Q < Q2$ ±2% in range $Q2 \leq Q \leq Q4$	
Material	Brass 59-1	
The Installation Sensivity	U0/D0	
Climatic and Mechanical	M1	
Key-press	Touch control technology	
Display	LCD 8 digit + prompt	
Menu Contents	Instantaneous flow ( $m^3/h$ ), cumulative flow ( $m^3$ ), full screen display, meter address, cumulative working time (h), date (year/month/day), caliber, software version	
Display Range	Total flow :0m <sup>3</sup> ~+99999.999m <sup>3</sup>	
Communication	Optical interface, LoRaWAN, LoRa RF, M-BUS, RS-485, wM-Bus, NB-IoT, 4G(CAT-1), Sigfox.	
Display and Indication	Unit: L/m <sup>3</sup> /Gal (optional)	
Data Storage	84 months	

## Installation Position

